



www.stutrailer.com

CUSTOMIZED TRAILERS

SEMI-TRAILERS BOAT TRAILERS

Lowbed · Low Loader · Flatbed · Tipper · Container · Car Transporter
STU Trailers® Company Ltd. · Karatay / Konya / Türkiye · Exporting to 60 countries

+90 541 336 63 77



sales@stutrailer.com

www.stutrailer.com


3 AXLE EXTENDABLE REMORQUE BOAT TRAILER



DETAIL PICTURES

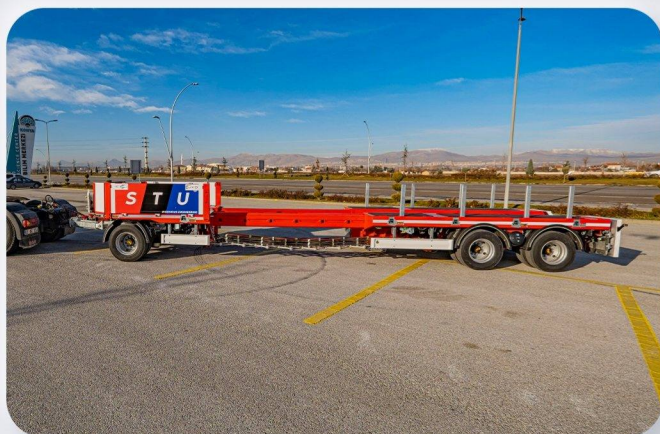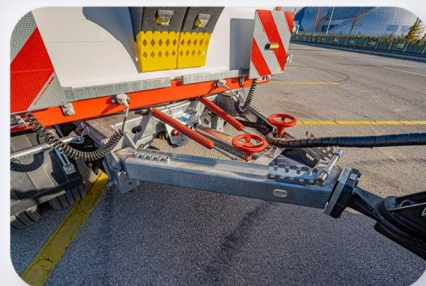

TECHNICAL DRAWING

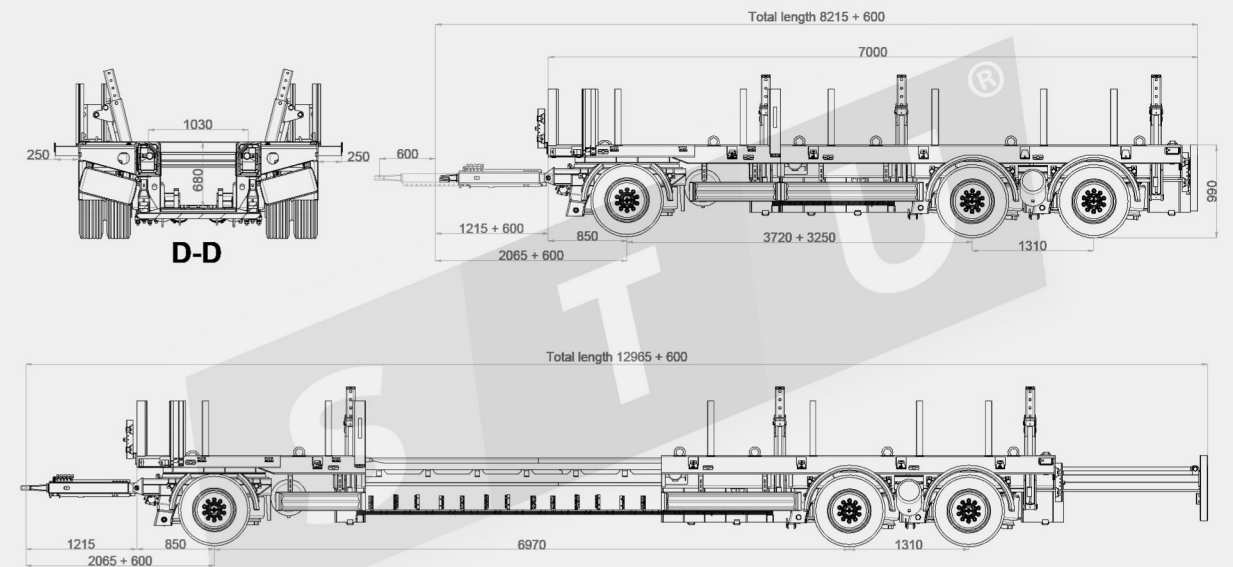

SPECIFICATIONS

Chassis : In line with the intended use and the capacity for safe transport, all trailer structures are designed with cross members of high strength and produced with high technology welding machines. Quality Strenx™ 700E (MC700) steel grade is using on productions

Connection Point : Cracked Triangle to Tow Set 100 KN tow eye / 57,5mm diameter with another coupling suitable for VBG

Upper Construction : Front Floor will be steel chequered plate, rest will be plywood

Axles : 3x12 Tonnes Capacity 17,5" Jumbo Axle, First Axle will be rotary table

Tyres : 235/65 R17,5" tyres with their rims According to the stocks, Half mudguards for tyres

Suspensions : Air Suspension

Brake System : Wabco or Knorr Bremse Brake 4S-3M EBS system

ELECTRICAL SYSTEM : 2x/ pin sockets - 24V, lights accord to standard in SAE rear dynamic led stop lamps (Dasteri™ Brand), side marker lamps, brake safety warning lamps and signal light fitted at the rear 2 tail & stop combined lamps (red), 2 turn signal combined lamps (orange), 1 licence lamp (white) , HELLA™ Brand 4 working led lights, 2 rear flash lamp

Painting

First Step : Sand Blasting all surface,

First Layer : Barrier (%80 Zinc-Reach) Coating Double Times - C5 (ISO 12944-2)

Second Layer : Epoxy Coating

Third Layer : Premium Acrylic Paint

Fourth Layer : 2K Super Clear Coating for Protection and Shine (95-110 GU) 60 Degree

ACCESSORIES & NOTES : Container Locks, Hydraulic Supporter Arms, Remote control for all hydraulic movements, galvanised parts, Lashing Rings, 40mm Plywood on surface, 12 x Side Stanchions, 4 Red-White Reflectors with turning lights, Extendable Drawbar, Aluminium small parts,

sales@stutrailer.com



www.stutrailer.com




4 AXLE EXTENDABLE REMORQUE BOAT TRAILER



DETAIL PICTURES

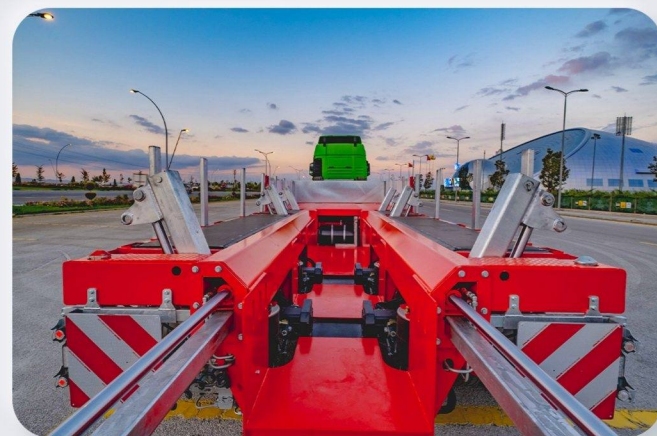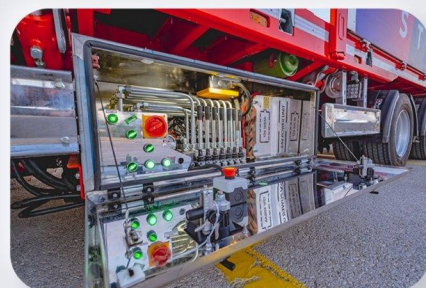

TECHNICAL DRAWING

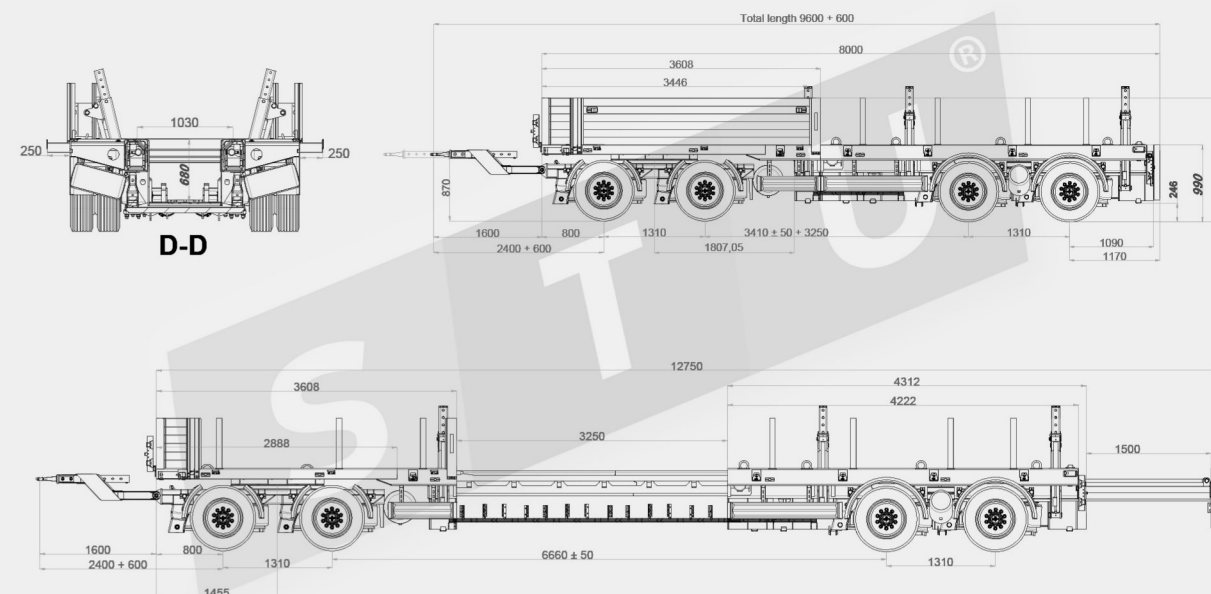

SPECIFICATIONS

Chassis : In line with the intended use and the capacity for safe transport, all trailer structures are designed with cross members of high strength and produced with high technology welding machines. Quality Strenx™ 700E (MC700) steel grade is using on productions

Connection Point : Cracked Triangle to Tow Set 100 KN tow eye / 57,5mm diameter with another coupling suitable for VBG

Upper Construction : Front Floor will be steel chequered plate, rest will be plywood

Axles : 4x12 Tonnes Capacity 17,5" Jumbo Axle, First Axle will be rotary table

Tyres : 235/65R17,5" tyres with their rims According to the stocks, Half mudguards for tyres

Suspensions : Air Suspension

Brake System : Wabco or Knorr Bremse Brake 4S-3M EBS system

ELECTRICAL SYSTEM : 2x/ pin sockets - 24V, lights accord to standard in SAE rear dynamic led stop lamps (Dasteri™ Brand), side marker lamps, brake safety warning lamps and signal light fitted at the rear 2 tail & stop combined lamps (red), 2 turn signal combined lamps (orange), 1 licence lamp (white) , HELLA™ Brand 4 working led lights, 2 rear flash lamp

Painting

First Step : Sand Blasting all surface,

First Layer : Barrier (%80 Zinc-Reach) Coating Double Times - C5 (ISO 12944-2)

Second Layer : Epoxy Coating

Third Layer : Premium Acrylic Paint

Fourth Layer : 2K Super Clear Coating for Protection and Shine (95-110 GU) 60 Degree

ACCESSORIES & NOTES : Container Locks, Hydraulic Supporter Arms, Remote control for all hydraulic movements, galvanised parts, Lashing Rings, 40mm Plywood on surface, 12 x Side Stanchions, 4 Red-White Reflectors with turning lights, Extendable Drawbar, Aluminium small parts

sales@stutrailer.com

www.stutrailer.com

